



HiMaxX 40

SOUND REINFORCEMENT MONITOR

APPLICATIONS

- Live Sound P.A. System or Live Sound Monitor, D.J. System
- School & Corporate Audio Visual Sound Reinforcement
- Background Music/Announcement: Restaurants, Pubs
- Transportation Terminals, Clubs, Auditoriums, Theatres
- Gyms, Houses of Worship

FEATURES

- Lightweight Polypropylene Cabinet, 35,2 lbs
- Power Handling: 500W RMS @ 8 Ohms
- B&C custom designed 12" neodymium woofer with 3" voice coil
- B&C 1" compression driver with 1.7" voice coil
- Input Panel with 2 x Neutrik Speakon NL-4 jacks
- Multiple mounting options: "wall, ceiling, cluster, speaker stand, optional accessories required"
- Four M10 fly points
- Optional Carrying Bags available for protection for portable use
- High SPL capability: 129dB
- Asymmetrical profile allows use as a floor stage monitor
- Two ergonomic handles built in for easy carrying



Designed, Engineered
and Manufactured in ITALY

PRODUCT DESCRIPTION

The FBT HiMaxX 40 passive speaker features lightweight, yet rugged gas injected molded polypropylene cabinet construction. The asymmetrical shape of the HiMaxX 40 cabinet also allows use as a floor stage monitor. The HiMaxX 40 passive speaker is a two way design incorporating a custom B&C 12" low frequency woofer 3" voice coil with a neodymium magnet structure, die cast aluminum frame and a B&C 1,7" voice coil compression driver coupled to a 90°H x 60°V horn with a 1" exit. The internal passive crossover filter featuring "soft-trip" circuitry to ensure full protection of LF woofer and HF driver. With a frequency range of 50Hz-20kHz, the HiMaxX 40 provides hi fidelity sound for both speech and music applications with a maximum SPL of 129dB. A front face steel grille protects the woofer from external damage. The rear input panel features 2 Neutrik NL-4 Speakon inputs to allow daisy chaining an additional HiMaxX 40 speaker. The four M10 fly points built into the cabinet, along with the optional Box 100 or Box 101 mounting brackets allow the HiMaxX 40 speakers to be surface mounted on walls or ceilings. A standard 1,38" speaker stand socket allows the HiMaxX 40 to be mounted on speaker stands.

ELECTRICAL PERFORMANCE

| | |
|---|--------------------|
| System Type: | 2 Way |
| Recommended Amplifier | 500W RMS |
| Long Term Applicable Power (AES) | 250W |
| Short Term Applicable Power (IEC 268-5) | 1000W |
| Nominal Impedance | 8 Ohm |
| Frequency Response @ -6dB | 50Hz - 20kHz |
| Sensitivity @ 1W, 1m | 99 dB |
| Maximum SPL (continuous/peak) * | 127dB / 129dB |
| Dispersion | 90°H x 60°V |
| Crossover Frequency | 1,6 kHz |
| Recommended HP Filter | 45 Hz - 24 dB oct. |





PHYSICAL

| | |
|-----------------------------|---|
| Low Frequency Woofer | 1x12" / 3" Coil |
| High Frequency Driver | 1" - 1,7" Coil |
| Input Connectors | 2 x Speakon NL4 |
| Net Dimensions (WxHxD) | 16" x 24,9" x 14,5" |
| Shipping Dimensions (WxHxD) | 19,5" x 28,3" x 18,5" |
| Net Weight | 35,2 lbs |
| Shipping Weight | 40,8 lbs |
| Enclosure Material | Polypropylene |
| Grille | Steel with powder coat black paint finish |


* CONT. SPL: free space, based on RMS recommended amp rating and LF transducer average sensitivity data, 125mS time average
PEAK SPL: free space, based on short term applicable power rating and system peak sensitivity, 10mS time average




Hi MaxX 40

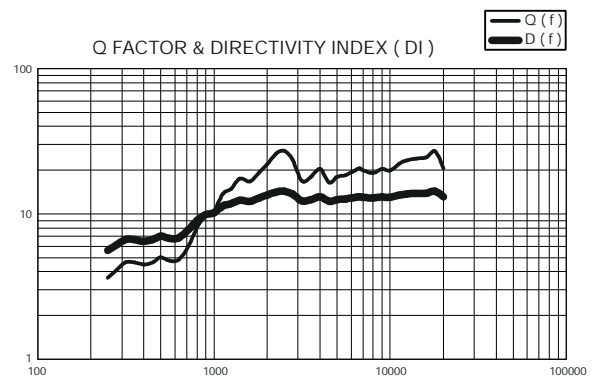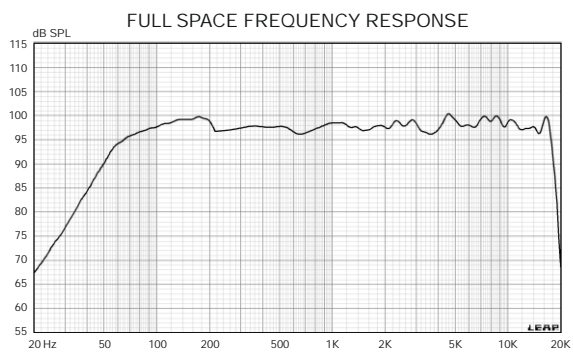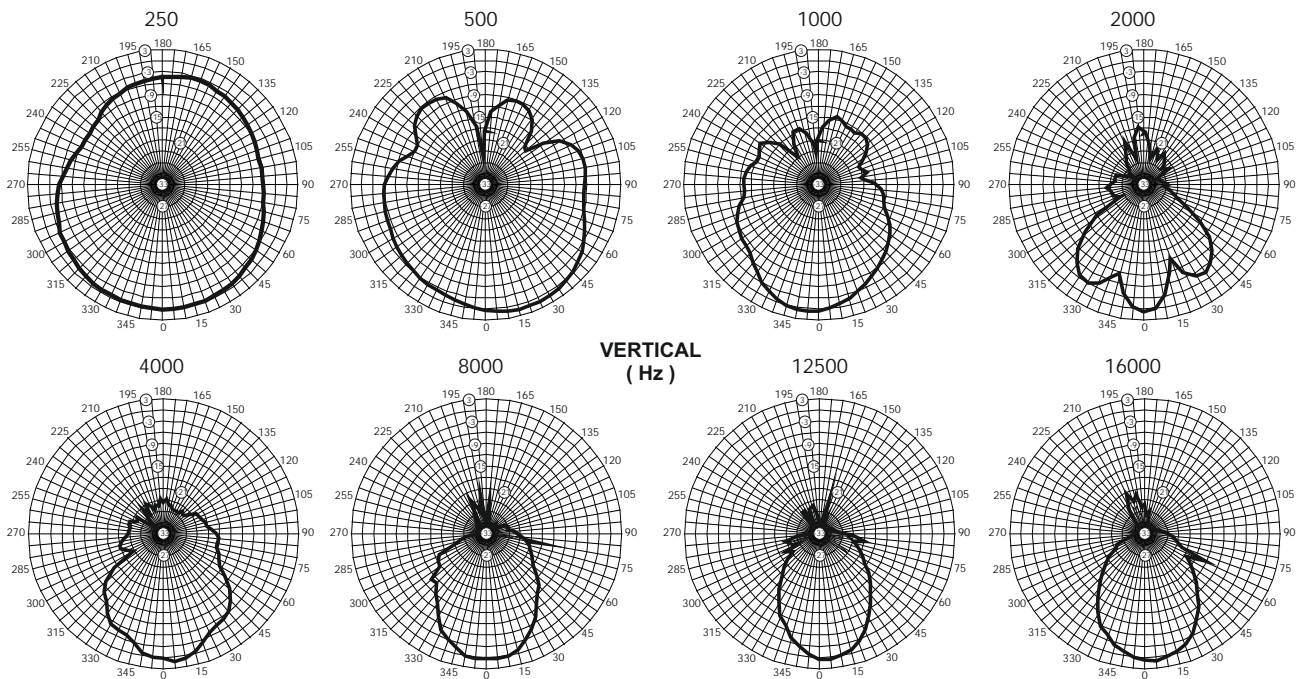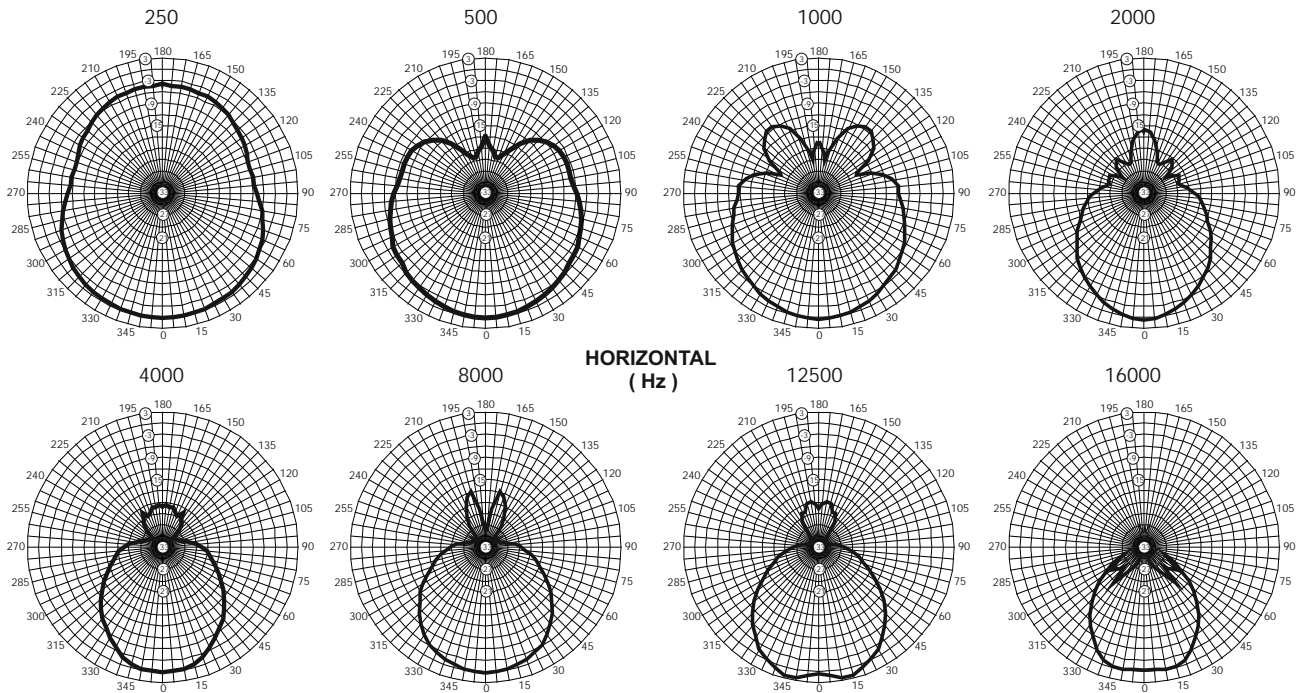


BLOCK DIAGRAM

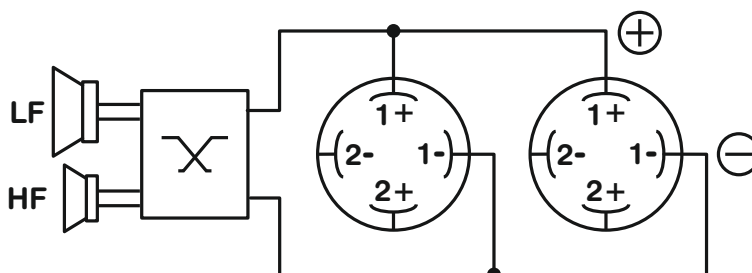

DIMENSION DRAWING

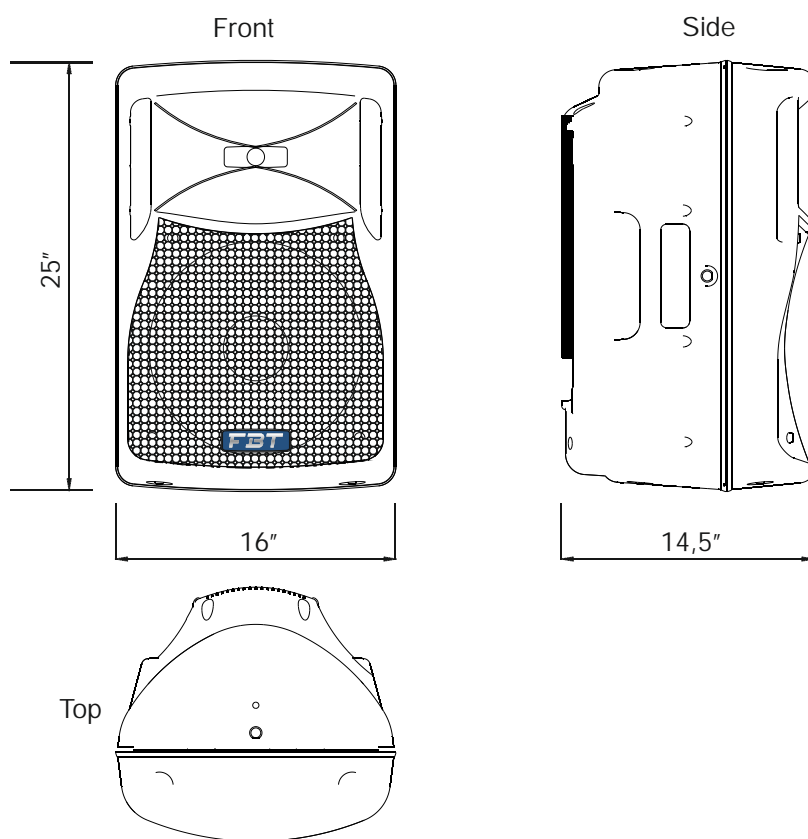

ACCESSORIES




BOX 100
Mount for
horizontal
wall installation




BOX 101
Mount for
vertical
wall installation



SS2
Standard speaker
floor stand




BOX 32BK
Adjustable aluminium
floor stand, damped
safety mechanism



BOX 22BK
Adjustable aluminium
floor stand, $\varnothing 1.38''$
with $\varnothing 1''$ adapter



BOX 52BK
Adjustable for
sub-satellite
speaker connection,
with safety locking
device



V29
Nylon case