

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it



Technical Datasheet

tasker® TSK1026 – 2x0,25 mm² - ZERO LOSS

Balanced Microphone Cable with Conductive Tape



CATEGORY
APPLICATIONS

Balanced Microphone Cable
 Long distances Audio connections

- A:** Black soft **PVC** Sheath. Outer Diam. Ø 6,00 (±0,20) mm.
- B:** Spiral Shielding in O.F.C. red copper, covering 100%.
- C:** Special Active Carbon Screen tape.
- D:** Core Insulation with compact PE colored one transparent and one orange. Diam. Ø 1,50 (±0,20) mm.
- E:** O.F.C. red copper formation 8x0,20 mm. Nom. Cross section 2x0,25 mm².


MARKING

tasker® TSK 1026 2x0,25 mm² - O.F.C.- ZERO LOSS - Low Capacitance – Active Carbon Screen - Audio Microphone Cable Made in Italy

CUSTOM PRODUCTION

This product may be custom produced also in **LSZH, PE, PUR**, with or without Metallic Armor.

Attenuation Test – Start 9 KHz – Stop 25 KHz

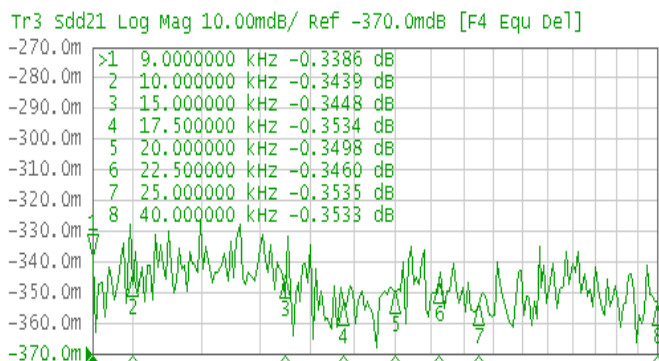

Cable Properties

Conductor Resistance	75 Ω/Km
Capacity Core/Core	55 pF/mt
Capacity Core/Shield	90 pF/mt
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	<input checked="" type="checkbox"/>	Indoor	Interno Edificio	INSTALLATION	<input checked="" type="checkbox"/>	Fixed	Fissa	INFORMATION	<input checked="" type="checkbox"/>	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	<input checked="" type="checkbox"/>	Restricted Mobile	Mobile Limitata	Informazioni	<input checked="" type="checkbox"/>	Ver. A / 16.05.17
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			